



	Fresh Water	Pool Water	Sea Water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug and Spray
Overflow/return box 100 E													

## OVERFLOW/RETURN BOX 100 E



These armature can be used to discharge excess pool water.

Overflow/return armature is installed in the vertical pool wall. Number of armatures used are based on the volume of water that will be returned. However at least two return armatures

should be used for safety reasons. A maximum return speed of 0.6 m/s should serve as the basis for calculating the nominal return pipe diameter. The connection ducts easily fit in all muffs of the drain pipes.

### Product characteristics at a glance

- For installation in vertical pool walls
- Large and effective debris sieves
- Connection suitable for the muffs of the drain pipe
- Manufactured completely of stainless steel

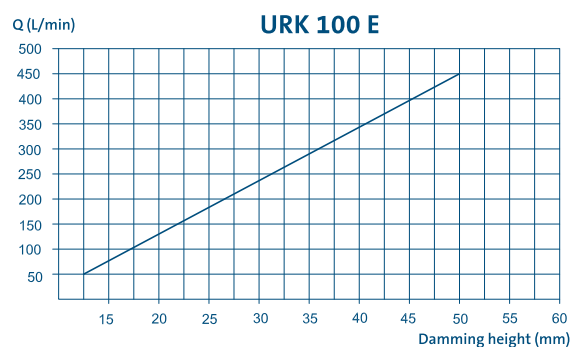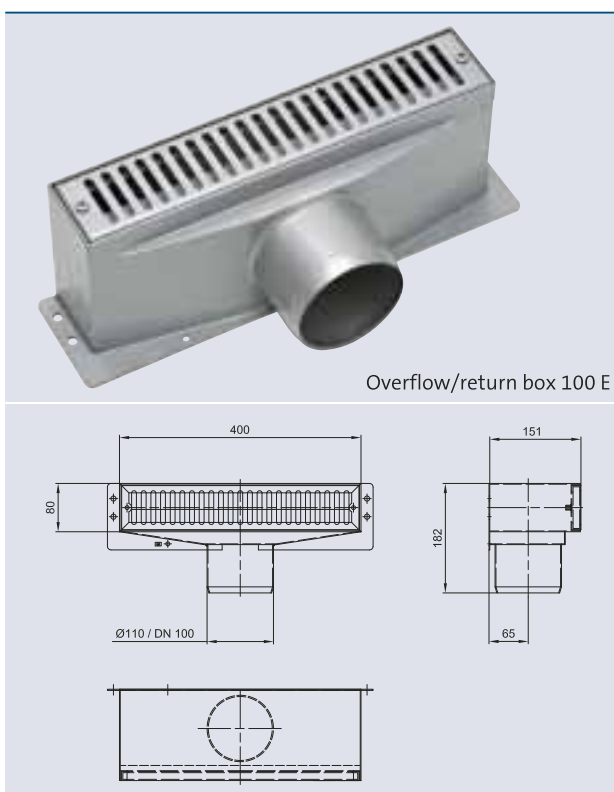

Overflow/return box 100 E	
Dimensions (L x W x H)	[mm] 450 x 150 x 180
For pools with liner	no
Connection	[DN] 100
Material	Stainless steel 1.4301 / 1.4571 (AISI 304/316Ti)
Weight	[kg] 6.0
Order no.	52602