

**OASE GmbH**  
 Tecklenburger Straße 161  
 D - 48477 Hörstel  
 Phone: +49(0)54 54 – 800  
 Fax: +49(0)54 54 – 80 322  
 info@oase-livingwater.com  
 www.oase-livingwater.com

# LED Modul MDD L 3D/DMX/02 70975





Fresh water	Pool water	Sea water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug & Spray



## Product characteristics at a glance:

- Energy efficient LED-RGB spotlight with holder
- Optimized for use with Multi Directional Drive L 2D/3D
- Temperature controlled high class LED
- For illumination of fountains up to approx. 15 m
- External electronic in an separate control/ power box – easy plugable connection
- Wet and dry installation – waterproof IP 68
- DMX/RDM capable
- Lifetime of up to 100.000 h\*
- Incl. 50720 Underwater LED Driver /DMX/02

\*In case of underwater application, an intelligent heat management and quality LED enables a lifetime of up to 100.000 hrs.  
 This claim does not entitle to a guarantee.

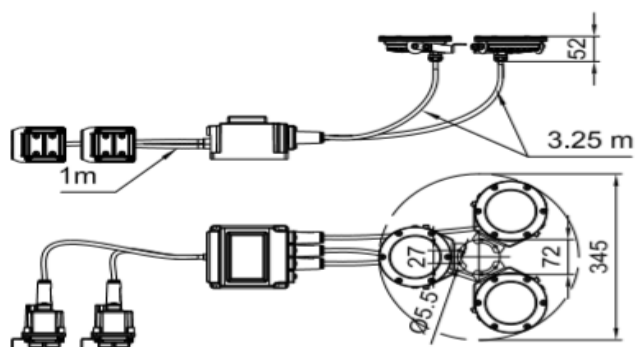

**OASE GmbH**  
 Tecklenburger Straße 161  
 D - 48477 Hörstel  
 Phone: +49(0)54 54 – 800  
 Fax: +49(0)54 54 – 80 322  
 info@oase-livingwater.com  
 www.oase-livingwater.com

# LED Modul MDD L 3D /DMX/02 70975



LED Modul MDD L 3D/DMX/02		
Luminous flux all on	[lm]	3 x 573
Luminous flux red	[lm]	3 x 172
Luminous flux green	[lm]	3 x 307
Luminous flux blue	[lm]	3 x 94
Beam angle	[°]	31
Strobe effect	[Hz]	25
Energy efficiency class of light fixture		A
Weighted energy consumption per light fixture	[kWh/1000h]	18
Rated voltage	[V/DC]	24
Power consumption	[W]	48
Rated current	[A]	2.1
Dim frequency	[Hz]	2.8 kHz
Power connection		1.00 m cable with box
DMX connection		1.00 m cable with box
Protection class		IP 68
Dimensions (ø x H)	[mm]	325 x 44
Material		Stainless steel 1.4404 (AISI 316 L)
Weight	[kg]	3,5
Order no.		70975

The information contained in this data sheet is the sole property of OASE GmbH. Any reproduction in part or as a whole without the written permission of OASE GmbH is prohibited.