



	Fresh Water	Pool Water	Sea Water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug and Spray
Schaumsprudler 35-10 E / 55-10 E / 55-15 E													
Schaumsprudler 75-20 Silver													

## SCHAUMSPRUDLER 35-10 E TO 75-20 SILVER

The lively bubbling water pattern generated by the foam effect nozzles is the optimal accessory for watercourse inlets, stepped pool installations, or fountain installations with a water reservoir at a lower level.

By mixing air with water, the pattern appears to be extremely high-volume. Nevertheless the nozzles actually have a low water requirement. The beautiful soft foam jet offers a strong contrast to its environment.

As opposed to Cascade and Geyser nozzles, Schaumsprudler nozzles work independently of the water level so that fluctuations in the water level do not affect the water pattern.

### Product characteristics at a glance

- High-contrast, lively water pattern
- Foam / spume effect
- Trouble-free continuous operation
- Offers oxygen enrichment
- Extensively wind-stable
- Water-level independent



35-10 E

55-10 E




55-15 E

75-20 Silver

Accessories (must be ordered separately)	Order no.
Swivel connection 10 silver (see page 244)	<b>51015</b>
Swivel connection 15 silver (see page 244)	<b>51016</b>
Swivel connection 20 silver (see page 244)	<b>51017</b>
Sleeve 10 silver (see page 244)	<b>51018</b>
Sleeve 15 silver (see page 244)	<b>51019</b>
Sleeve 20 silver (see page 244)	<b>51020</b>

Accessories (must be ordered separately)	Order no.
Adapter G 10 / NPT 10 (see page 244)	<b>51026</b>
Adapter G 15 / NPT 15 (see page 244)	<b>51027</b>
Adapter G 20 / NPT 20 (see page 244)	<b>51028</b>
Reducing sleeve 15 x 10 (see page 245)	<b>51032</b>
Reducing sleeve 20 x 15 (see page 245)	<b>51030</b>
Swivel ball joint 10 (see page 245)	<b>51165</b>

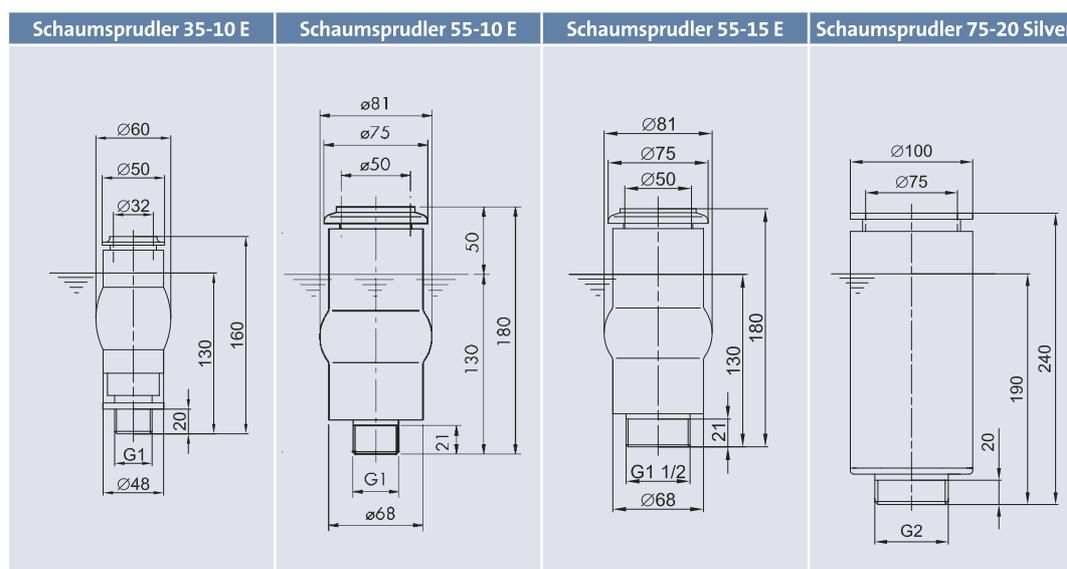

		Schaumsprudler 35-10 E		Schaumsprudler 55-10 E		Schaumsprudler 55-15 E		Schaumsprudler 75-20 Silver	
Dimensions (Ø x H) [mm]		60 x 160		81 x 180		81 x 180		100 x 240	
Fountain height		DWB	DDB	DWB	DDB	DWB	DDB	DWB	DDB
		l/min	bar	l/min	bar	l/min	bar	l/min	bar
0.25	[m]	47	0.10	60	0.11				
0.50	[m]	55	0.14	84	0.21	125	0.11		
0.75	[m]	71	0.22	108	0.32	151	0.15		
1.00	[m]	80	0.28	122	0.40	176	0.19	328	0.20
1.25	[m]	89	0.34	134	0.49	198	0.24	367	0.24
1.50	[m]	97	0.40	145	0.58	217	0.28	401	0.29
1.75	[m]	104	0.46	156	0.66	235	0.33	433	0.34
2.00	[m]	111	0.52	166	0.75	252	0.38	463	0.39
2.50	[m]	123	0.65	184	0.92	282	0.48	518	0.49
3.00	[m]			200	1.09	310	0.58	567	0.58
3.50	[m]			216	1.27	335	0.67	612	0.68
4.00	[m]					359	0.77	655	0.78
4.50	[m]					381	0.87	695	0.87
5.00	[m]					402	0.97	733	0.97
6.00	[m]					441	1.16	803	1.17
7.00	[m]					477	1.36	868	1.33
8.00	[m]							928	1.56
9.00	[m]							965	1.75
10.00	[m]							1039	1.95
Material		Stainless steel 1.4301 (AISI 304)		Stainless steel 1.4571 (AISI 316Ti) / Brass				Double coated brass	
Weight	[kg]	0.5		1.2		1.4		4.3	
Order no.		<b>50984</b>		<b>50986</b>		<b>50987</b>		<b>50768</b>	

# SCHAUMSPRUDLER 35-10 E

NOZZLES

CLASSIC

