


OASE GmbH
 Tecklenburger Straße 161
 D - 48477 Hörstel
 Phone: +49(0)54 54 – 800
 Fax: +49(0)54 54 – 80 322
 info@oase.com
 www.oase-professional.com

SplashKit LED XL RGrBW square /DMX/02 84839



Fresh water	Pool water	Sea water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug & Spray


Product characteristics at a glance:

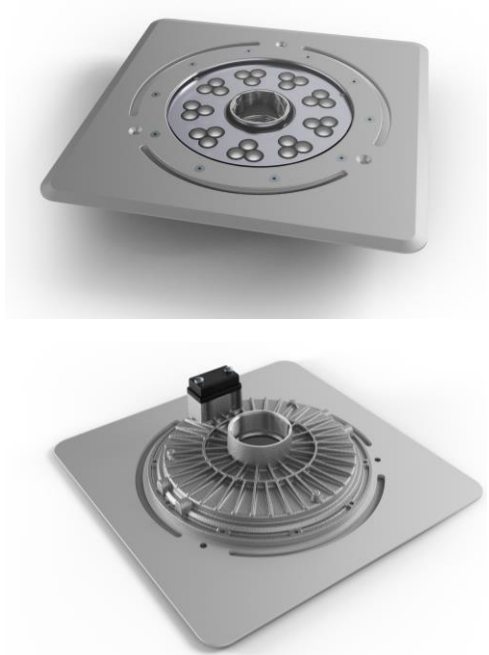

- Square LED spotlight for ground installation
- Adapted for use in the embedded or hanging SplashKit
- RGBW spotlights with almost unlimited colour spectrum
- Powerful and intense illumination of the different water patterns
- Homogeneous illumination of the fountain with uniformly calibrated LEDs
- Drain holes for returning water
- Central opening for connecting the Orb Nozzle
- Control via DMX/RDM (programming support and status information on temperature and operating hours)
- Easy installation via the OASE ProNect system
- Load up to 20 kN
- Lifetime up to 100,000 hrs*
- UL certified
- Matching winter cover available

*In case of underwater application, an intelligent heat management and quality brand LED enables a lifetime of up to 100.000 hrs. This claim does not entitle to a guarantee.

Product Drawing:

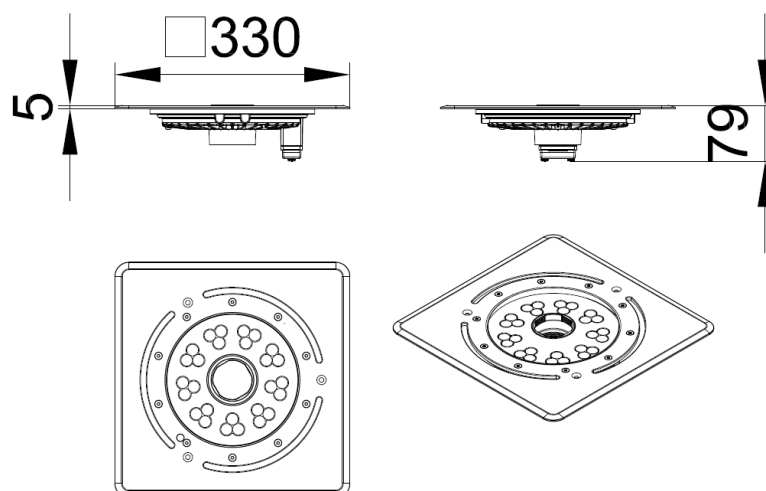


The information contained in this data sheet is the sole property of OASE GmbH. Any reproduction in part or as a whole without the written permission of OASE GmbH is prohibited.

21.07.2020 FM


Version 1.0

sheet 1/4

Example of use – embedded SplashKit

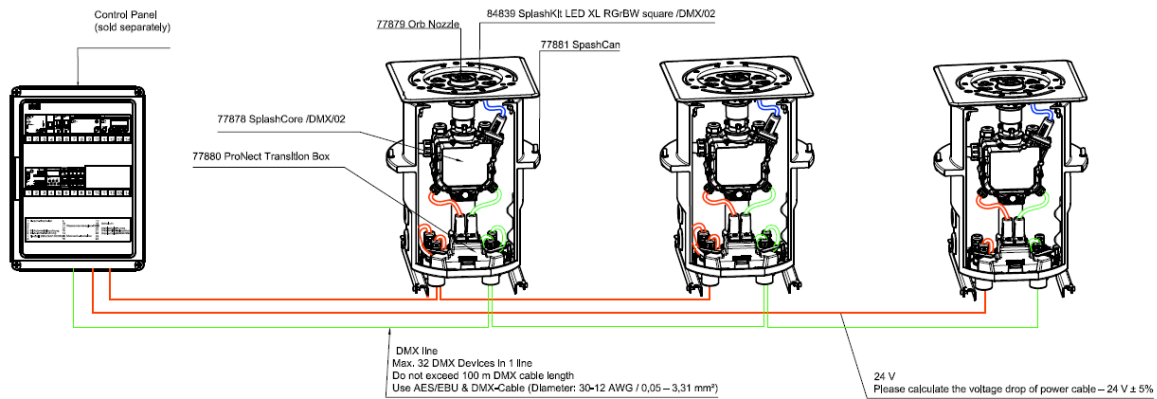

Example of use – hanging SplashKit

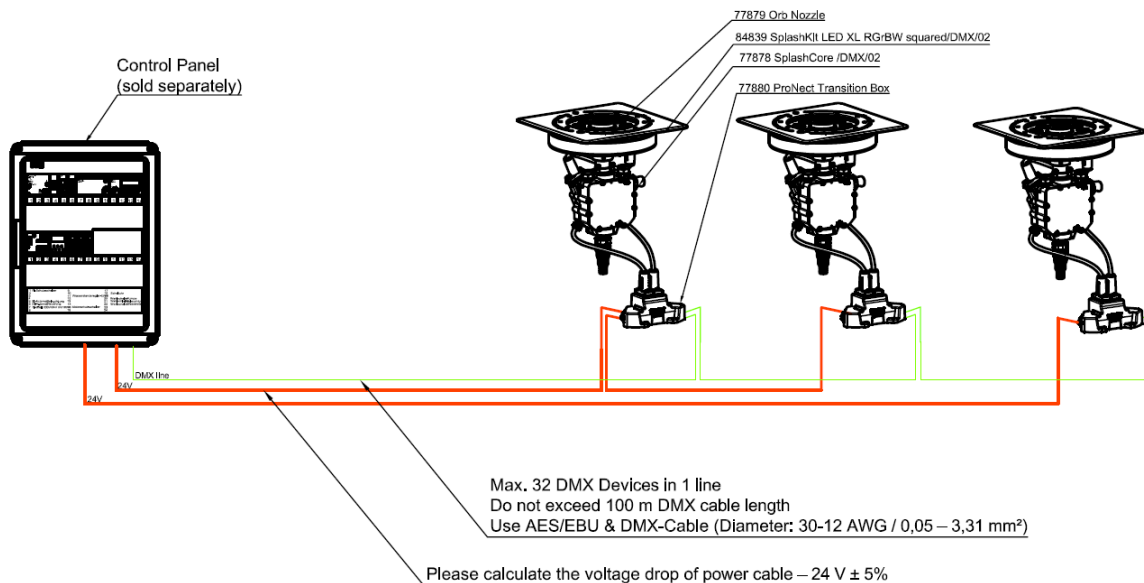


OASE GmbH
 Tecklenburger Straße 161
 D - 48477 Hörstel
 Phone: +49(0)54 54 – 800
 Fax: +49(0)54 54 – 80 322
 info@oase.com
 www.oase-professional.com


SplashKit LED XL RGrBW square /DMX/02 84839




Red:

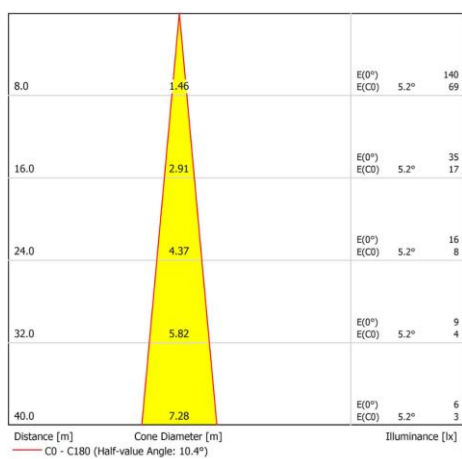


Green:

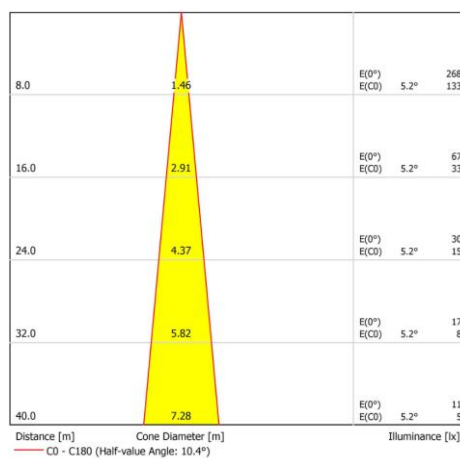

Blue:

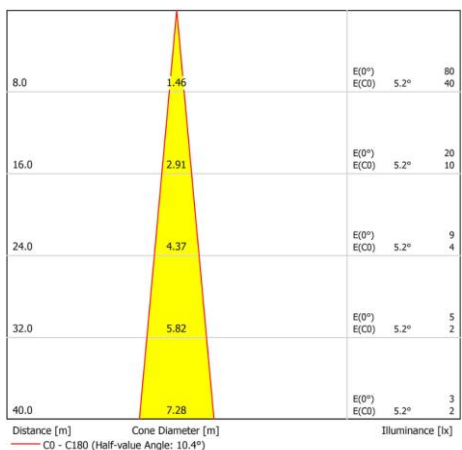

White:

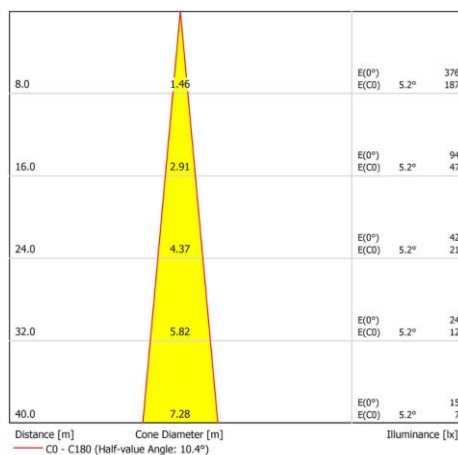


OASE GmbH
 Tecklenburger Straße 161
 D - 48477 Hörstel
 Phone: +49(0)54 54 – 800
 Fax: +49(0)54 54 – 80 322
 info@oase.com
 www.oase-professional.com

SplashKit LED XL RGrBW square /DMX/02 84839



All on:

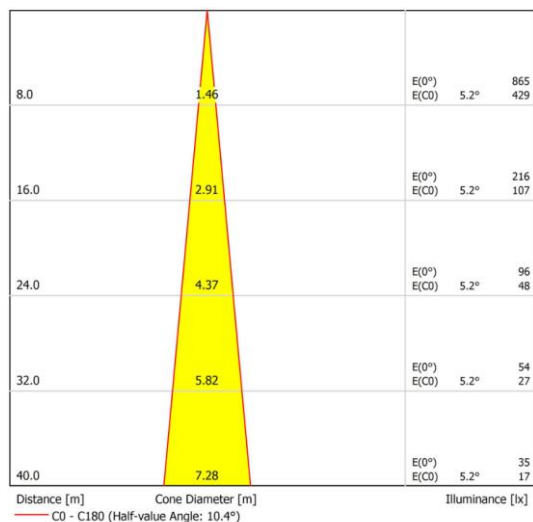

SplashKit LED RGrBW square /DMX/02

Luminous flux all on	Lm	2511
Luminous flux red	Lm	720
Luminous flux green	Lm	1380
Luminous flux royal blue	Lm	411
Luminous flux white	Lm	391
Colour temperature white	K	4000 (±200)
Beam angle	°	11
Strobe effect	Hz	0-25
Energy efficiency class		B
Weighted energy consumption	kWh/1000h	77
Rated voltage	V/DC	24
Power consumption	W	70
Rated current	A	3.1
Dim frequency	Hz	2800
Power connection		Hybrid plug
Protection class		IP 68/4m
Pressure side connection	Inch	2
Dimensions	(Ø x H)	330 x 330 x 63
Max. load	kN	20
Material		Stainless steel 1.4571 (AISI 316 Ti)
Weight	kg	6.1
Order No.		84839

The information contained in this data sheet is the sole property of OASE GmbH. Any reproduction in part or as a whole without the written permission of OASE GmbH is prohibited.

21.07.2020 FM

Version 1.0

sheet 4/4